

BAU- UND Elektrikergips

Fast-setting building plaster



MATERIAL

GYPSUM BINDER

Powdered construction product without factory-added additives (calcium sulphate hemihydrate).

Complies with EN 13279-1 – A2
Direct use



INTENDED USE

REPAIR & INSTALLATION

For standard on-site assembly, installation and repair work indoors.



APPLICATION

BY HAND

Sprinkle into clean water, allow to settle and stir.

Working time approx. 10–20 mins at a minimum of +5 °C to a maximum of +30 °C

ADVANTAGES

Building plaster without additives.
Fast-setting.
High sag resistance.
High strength.
Universal fastening, embedding, and filling.


SUBSTRATES

CONCRETE
MASONRY
INTERIOR PLASTER

MATERIAL REQUIREMENTS

Depending on the application
Adjust the required amount of material to the working time.



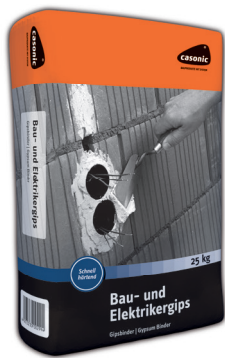

BAU- UND Elektrikergips

Fast-setting building plaster



TECHNICAL SPECIFICATION

DIN EN 13279-1 – Gypsum binder A2 For direct use on site.
Non-combustible (A1).

APPLICATION

Assembly, installation, and repair work.
Setting of interior plaster beads and rails.
Closing of blowholes, holes, and chases.
Universal fastening, embedding, filling, and smoothing.

SUBSTRATES

On all suitable, standard building substrates indoors.
Applicable at air and component temperatures from min. +5 °C to max. +30 °C.

MIXING

Sprinkle the material into clean water up to the water line and allow it to soak. Do not mix with foreign materials. Stir the material thoroughly after soaking. Prepare only as much material as can be applied within 10–20 minutes. Adding extra water and/or re-stirring will not make material that has already begun to set usable again. Clean tools immediately after use.

DRYING

Completely dry after just a few hours (depending on the applied quantity). Avoid persistently high humidity and ensure adequate ventilation.

PRODUCT DATA

Casonic Bau- und Elektrikergips 1,5 kg
Packaging unit: 480 bags/pallet | Art. No.: 11151 | EAN: 4003230005322
Casonic Bau- und Elektrikergips 5 kg
Packaging unit: 120 bags/pallet | Art. No.: 11142 | EAN: 4003230003076
Casonic Bau- und Elektrikergips 10 kg
Packaging unit: 60 bags/pallet | Art. No.: 11148 | EAN: 4003230002949
Casonic Bau- und Elektrikergips 10 kg
Packaging unit: 44 bucket/pallet | Art. No.: 11196 | EAN: 4003230003724
Casonic Bau- und Elektrikergips 25 kg
Packaging unit: 24 bags/pallet | Art. No.: 11114 | EAN: 4003230002994
Casonic Bau- und Elektrikergips 25 kg
Packaging unit: 40 bags/pallet | Art. No.: 11149 | EAN: 4003230002994

Shelf life approx. 12 months from date of manufacture. Store in a cool, dry place.

The wide range of applications and the varying conditions during installation of our materials, as well as health and safety aspects, require the user to observe our technical and safety-related information; this applies in conjunction with the generally accepted rules of good building practice, e.g., relevant standards and corresponding technical regulations. Declarations of performance and other documents are available at www.ce.casonic-bauprodukte.de

Revision VGO | CBP | TM | B&E | EN | 07.26 | 1 | 0